


**MODEL: 100B-30W
100B-50W
100B-80W
100B-90W
100B-120W
100B-150W**



Osvetlenie na diaľku, model 100B-150W

2m	3253,91 LUX	1,8 x 1,8m
4m	813,48 LUX	3,6 x 3,5m
6m	361,55 LUX	5,5 x 5,3m
8m	203,37 LUX	8,3 x 7,1m
10m	130,16 LUX	9,1 x 8,9m
12m	90,39 LUX	10,9 x 10,6m

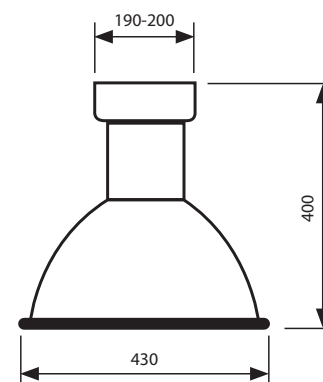

	100B-30W	100B-50W	100B-80W	100B-90W
vstupné napätie	AC: 90V-265V	AC: 90V-265V	AC: 90V-265V	AC: 90V-265V
pracovné napätie	DC: 36V	DC: 36V	DC: 36V	DC: 36V
príkon	35W	58W	95W	120W
svetelný tok	2700lm	4500lm	7200lm	8100lm
index podannia ferieb (Ra)	>75%	>75%	>75%	>75%
IP trieda	IP22*	IP22*	IP22*	IP22*
životnosť (hod.)	50.000	50.000	50.000	50.000
prevádzková teplota	-40°C ~ 50°C	-40°C ~ 50°C	-40°C ~ 50°C	-40°C ~ 50°C
účinník	0,92	0,92	0,92	0,92
hmotnosť	6,7kg	7kg	8kg	8,4kg

Kontakty:

Freya Slovakia s.r.o.
Bánovská 134
Trenčianska Turná
913 21 Slovenská republika

Tel: +421 32 286 14 84
Mob: +421 904 40 40 16

Email: led@freya.sk

www.freyaled.sk

100B-120W	100B-150W
AC: 90V-265V	AC: 90V-265V
DC: 36V	DC: 36V
146W	190W
10800lm	13500lm
>75%	>75%
IP22*	IP22*
50.000	50.000
-40°C ~ 50°C	-40°C ~ 50°C
0,92	0,92
8,2kg	8,5kg

* IP triedu je možné na požiadanie zvýšiť až na IP 65